

MAG-Bit+™



INSERTI CON SISTEMA DI TRATTENIMENTO MAGNETICO
1/4" bits with magnetic retention system

MAG-Bit+™ system




500g
TX10 - TX15



600g
PH1 - PZ1
TX20 - TX25

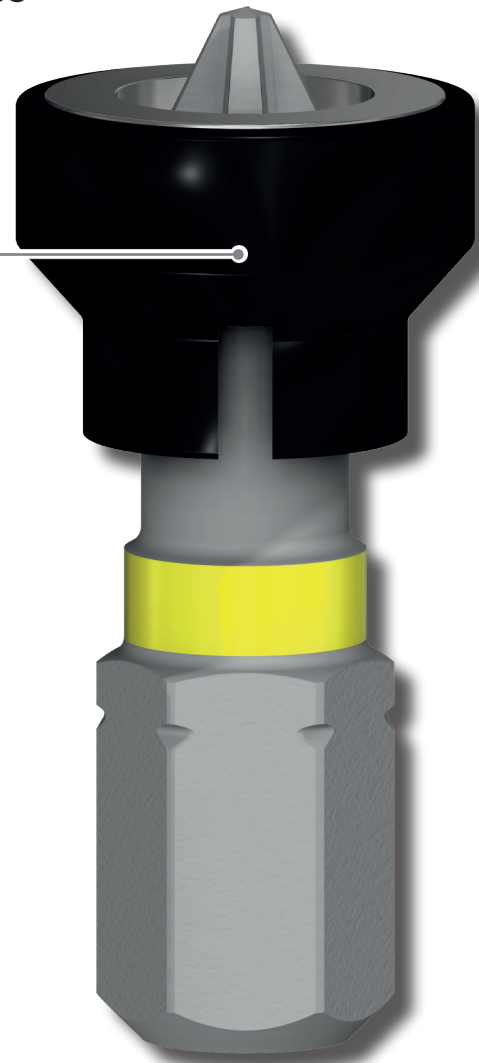
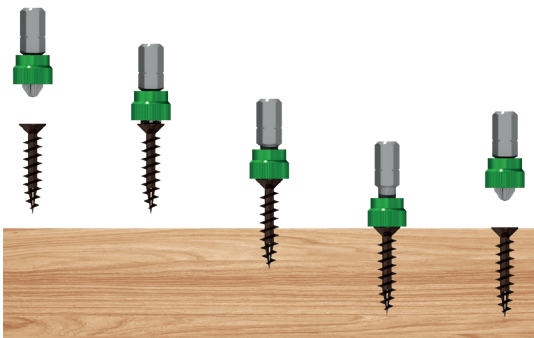


750g
PH2 - PH3
PZ2 - PZ3
TX27 - TX30




800g
TX40

Utilizzo Use



Applicazioni
applications



Trattenimento magnetico in quattro diversi formati e capacità per adattarsi correttamente ad ogni tipo e dimensione di vite.

Magnetic retention system in four different sizes and capacities able to hold any type and size of screw.





Codice colore per un riconoscimento facile e immediato sia della misura che del tipo di impronta.

COLOUR code for easy and immediate recognition of the size and profile of screw.



Sistema di trattenimento semplice e innovativo per risolvere molti problemi di avvitatura nel settore professionale.

Innovative simple retention system to solve many screwdriving problems in the professional sector.

**61355****PH MAG-Bit+™ U****INSERTI 1/4" C PHILLIPS® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" C PHILLIPS® BITS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole

	L mm	PCS.	COD.
PH1	25	10	61355005
PH2	25	10	61355010
PH3	25	10	61355015

**SELFPACK**
2 pcs.

	L mm	COD.
PH1	25	61355005002
PH2	25	61355010002
PH3	25	61355015002

**MINIBOX**
10 pcs.

	L mm	COD.
PH1	25	61355005010
PH2	25	61355010010
PH3	25	61355015010

61356**PH MAG-Bit+™ U****LAME 1/4" E PHILLIPS® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" E PHILLIPS® POWER BITS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole



	L mm	PCS.	COD.
PH1	50	5	61356005
PH2	50	5	61356010
PH3	50	5	61356015

**SELFPACK**
2 pcs.

	L mm	COD.
PH1	50	61356005002
PH2	50	61356010002
PH3	50	61356015002

**MINIBOX**
5 pcs.

	L mm	COD.
PH1	50	61356005005
PH2	50	61356010005
PH3	50	61356015005

**61365****PZ MAG-Bit+™ U****INSERTI 1/4" C POZIDRIV® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" C POZIDRIV® BITS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole

	L mm	PCS.	COD.
PZ1	25	10	61365005
PZ2	25	10	61365010
PZ3	25	10	61365015

**SELFPACK**
2 pcs.

	L mm	COD.
PZ1	25	61365005002
PZ2	25	61365010002
PZ3	25	61365015002

**MINIBOX**
10 pcs.

	L mm	COD.
PZ1	25	61365005010
PZ2	25	61365010010
PZ3	25	61365015010

61366**PZ MAG-Bit+™ U****LAME 1/4" E POZIDRIV® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" E POZIDRIV® POWER BITS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole


	L mm	PCS.	COD.
PZ1	50	5	61366005
PZ2	50	5	61366010
PZ3	50	5	61366015

**SELFPACK**
2 pcs.

	L mm	COD.
PZ1	50	61366005002
PZ2	50	61366010002
PZ3	50	61366015002

**MINIBOX**
5 pcs.

	L mm	COD.
PZ1	50	61366005005
PZ2	50	61366010005
PZ3	50	61366015005

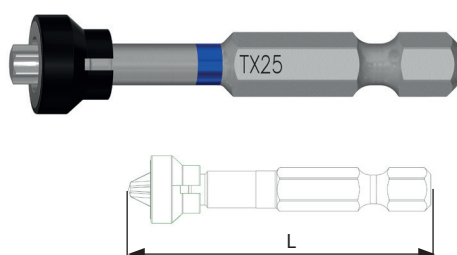
**61375****TX MAG-Bit+™ U****INSERTI 1/4" C PER VITI TORX® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" C BITS FOR TORX® SCREWS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole

	L mm	PCS.	COD.
TX10	25	10	61375005
TX15	25	10	61375010
TX20	25	10	61375015
TX25	25	10	61375020
TX27	25	10	61375025
TX30	25	10	61375030
TX40	25	10	61375035

	L mm	COD.
TX10	25	61375005002
TX15	25	61375010002
TX20	25	61375015002
TX25	25	61375020002
TX27	25	61375025002
TX30	25	61375030002
TX40	25	61375035002

**SELPACK**
2 pcs.**MINIBOX**
10 pcs.

	L mm	COD.
TX10	25	61375005010
TX15	25	61375010010
TX20	25	61375015010
TX25	25	61375020010
TX27	25	61375025010
TX30	25	61375030010
TX40	25	61375035010


61376**TX MAG-Bit+™ U****LAME 1/4" E PER VITI TORX® CON TRATTENIMENTO MAGNETICO E CODICE COLORE**
1/4" E POWER BITS FOR TORX® SCREWS WITH MAGNETIC RETENTION AND COLOR CODE**58/60 HRC****EASYPACK** | sacchetto PVC con Euro-hole • PVC bags with Euro-hole

	L mm	PCS.	COD.
TX10	50	5	61376005
TX15	50	5	61376010
TX20	50	5	61376015
TX25	50	5	61376020
TX27	50	5	61376025
TX30	50	5	61376030
TX40	50	5	61376035

	L mm	COD.
TX10	50	61376005002
TX15	50	61376010002
TX20	50	61376015002
TX25	50	61376020002
TX27	50	61376025002
TX30	50	61376030002
TX40	50	61376035002

**SELPACK**
2 pcs.**MINIBOX**
5 pcs.

	L mm	COD.
TX10	50	61376005005
TX15	50	61376010005
TX20	50	61376015005
TX25	50	61376020005
TX27	50	61376025005
TX30	50	61376030005
TX40	50	61376035005

**66002****MYBIT 7 ASSORTIMENTI MAG-Bit+™****ASSORTIMENTO 7 PCS. - INSERTI + PORTAININSERTI****7 PCS. SET - BITS + BIT HOLDER**COD. **66002445****7
pcs.**PH1
1pc.PH2
1pc.PZ1
1pc.PZ2
1pc.TX25
1pc.TX30
1pc.

100 X 120 mm

INCLUSO
INCLUDED
COD. 62013005**66002****DISPLAY MYBIT 7 MAG-Bit+™****ESPOSITORE DA BANCO PER 12 BIT-SET****12 PCS. BIT-SET DISPLAY**COD. **66002449****12
pcs.**12 pcs.
COD. 66002445

150 X 40 X 195 mm

**66001****STORE 9 ASSORTIMENTI MAG-Bit+™****CASSETTIERA CON 9 SCOMPARTI PER ESPOSITORE MULTISTORE****DRAWERS WITH 9 COMPARTMENTS FOR MULTISTORE DISPLAY**COD. **66001080****110
pcs.**

600 X 90 X 65 mm

61355			61365		61375			
PH1	PH2	PH3	PZ1	PZ2	TX20	TX25	TX30	TX40
10pcs.	20pcs.	10pcs.	10pcs.	20pcs.	10pcs.	10pcs.	10pcs.	10pcs.

**MULTI STORE**

COD. 66001005VC

L'utilizzo degli inserti MAG-Bit+ permette di lavorare con una mano libera.*The use of MAG-Bit+ bits allows you to work with a free hand.*

**66001****MULTI *BIT* ESPOSITORE INSERTI MAG-Bit+™****ESPOSITORE DA BANCO CON 25 SCOMPARTI**
DISPLAY WITH 25 COMPARTMENTS**260
pcs.**COD. **66001340****445 X 465 X 210 mm****STRUTTURA IN POLIPROPILENE ALVEOLARE AUTOPORTANTE, 25 SCOMPARTI.**
SELF-SUPPORTING POLYPROPYLENE HONEYCOMB STRUCTURE, 25 COMPARTMENTS.

61355

PH1
10pcs.PH2
20pcs.PH3
10pcs.

61365

PZ1
10pcs.PZ2
20pcs.PZ3
10pcs.

61375

TX10
10pcs.TX15
10pcs.TX20
10pcs.TX25
20pcs.TX30
20pcs.TX40
20pcs.

61356

PH1
5pcs.PH2
10pcs.PH3
5pcs.

61366

PZ1
5pcs.PZ2
10pcs.PZ3
5pcs.

61376

TX10
5pcs.TX15
5pcs.TX20
5pcs.TX25
10pcs.TX30
10pcs.TX40
10pcs.

62018005



5pcs.

**66001**

ESPOSITORE MINIBOX MAG-BIT+ (TM)

ESPOSITORE DA BANCO PER MINIBOX
DISPLAY STAND FOR MINIBOX

**240
pcs.**COD. **66001530**

			L mm	COD.	box
10 pcs.		PH1	25	61355005010	2
10 pcs.		PH2	25	61355010010	3
10 pcs.		PH3	25	61355015010	2
5 pcs.		PH2	50	61356010005	2
10 pcs.		PZ1	25	61365005010	2
10 pcs.		PZ2	25	61365010010	3
10 pcs.		PZ3	25	61365015010	2
5 pcs.		PZ2	50	61366010005	2
10 pcs.		TX20	25	61375015010	1
10 pcs.		TX25	25	61375020010	2
10 pcs.		TX30	25	61375030010	2
10 pcs.		TX40	25	61375035010	2
1 pc.		MYBIT 7		66002445	4
1 pc.				62015010001	3
1 pc.				62029005	3

370 X 545 X 220 mm

STRUTTURA IN FILO METALLICO DA BANCO ED APPENDIBILE ADATTA AD ACCOGLIERE
20 MISURE DIVERSE DI INSERTI CONFEZIONATI IN MINIBOX E DUE ARTICOLI ACCESSORI.
COUNTERTOP OR WALL-MOUNTED METAL WIRE STRUCTURE, SUITABLE FOR HOLDING BITS
IN 20 DIFFERENT SIZES, MINIBOX PACKED AND TWO ACCESSORIES.

SCHEDE TECNICHE TECHNICAL DATASHEETS

PHILLIPS®

A REGISTERED TRADEMARK OF PHILLIPS SCREW COMPANY


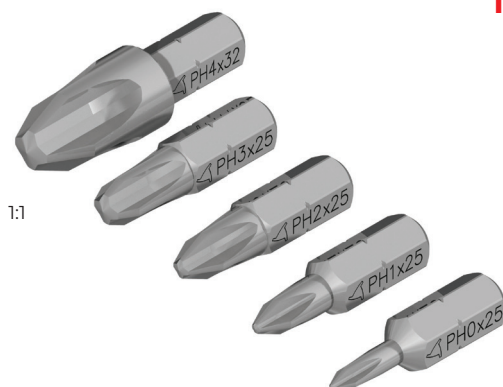


IN ACCORDO A NORME INTERNAZIONALI
IN ACCORDANCE WITH INTERNATIONAL STANDARDS

COPPIA DI TORSIONE SECONDO NORME
TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

**DIN 5260
ISO 8764**

**DIN 5261*
ISO 8764***



					Autofilettanti per metallo Self-tapping for metal			Autofilettanti per legno Self-tapping for wood			Metriche Metrics		
													
	A	Ø	 Nm	 Nm	ISO 7049 = DIN 7981	ISO 7050 = DIN 7982	ISO 7051 = DIN 7983	DIN 7996	DIN 7997	DIN 7995	ISO 7045 = DIN 7985	ISO 7046 = DIN 965	ISO 7047 = DIN 966
PH0	0,84	3	1,0	1,0	2,2	2,2	2,2	2,0	2,0	2,0	2,0	2,0	2,0
PH1	1,30	4,5	3,5	3,8	2,2 2,9	2,2 2,9	2,2 2,9	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0
PH2	2,31	6	8,2	10,3	3,5 4,8	3,5 4,8	3,5 4,8	3,5 5,0	3,5 5,0	3,5 5,0	4,0 5,0	4,0 5,0	4,0 5,0
PH3	3,84	8	19,5	32,0	5,5 6,3	5,5 6,3	5,5 6,3	5,5 7,0	5,5 7,0	5,5 7,0	6,0	6,0	6,0
PH4	5,11	10	38,0	88,7	8,0 9,5	8,0 9,5	8,0 9,5	8,0	8,0	8,0	8,0 10,0	8,0 10,0	8,0 10,0

* LE NORME PREVEDONO CHE SOTTO IL VALORE DI COPPIA INDICATA IL PROFILO DELL'UTENSILE NON PRESENTI ALCUNA DEFORMAZIONE

* THE STANDARDS REQUIRE THAT THE TOOL PROFILE DOES NOT DEFORM UNDER THE INDICATED TORQUE VALUES

SCHEDE TECNICHE


TECHNICAL DATASHEETS

POZIDRIV®

A REGISTERED TRADEMARK OF PHILLIPS SCREW COMPANY


 IN ACCORDO A NORME INTERNAZIONALI
 IN ACCORDANCE WITH INTERNATIONAL STANDARDS

 COPPIA DI TORSIONE SECONDO NORME
 TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

DIN 5260
ISO 8764
DIN 5261*
ISO 8764*


					Autofilettanti per metallo Self-tapping for metal			Autofilettanti per legno Self-tapping for wood			Metriche Metrics		
													
	A	Ø	 Nm	 Nm	ISO 7049 = DIN 7981	ISO 7050 = DIN 7982	ISO 7051 = DIN 7983	DIN 7996	DIN 7997	DIN 7995	ISO 7045 = DIN 7985	ISO 7046 = DIN 965	ISO 7047 = DIN 966
PZ0	0,45	3	1,0	1,0	2,2	2,2	2,2	2,0	2,0	2,0	2,0	2,0	2,0
PZ1	0,71	4,5	3,5	3,8	2,2 2,9	2,2 2,9	2,2 2,9	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0	2,5 3,0
PZ2	1,00	6	8,2	10,3	3,5 4,8	3,5 4,8	3,5 4,8	3,5 5,0	3,5 5,0	3,5 5,0	4,0 5,0	4,0 5,0	4,0 5,0
PZ3	1,38	8	19,5	32,0	5,5 6,3	5,5 6,3	5,5 6,3	5,5 7,0	5,5 7,0	5,5 7,0	6,0	6,0	6,0
PZ4	2,10	10	38,0	88,7	8,0 9,5	8,0 9,5	8,0 9,5	8,0	8,0	8,0	8,0 10,0	8,0 10,0	8,0 10,0

* LE NORME PREVEDONO CHE SOTTO IL VALORE DI COPPIA INDICATA IL PROFILO DELL'UTENSILE NON PRESENTI ALCUNA DEFORMAZIONE

* THE STANDARDS REQUIRE THAT THE TOOL PROFILE DOES NOT DEFORM UNDER THE INDICATED TORQUE VALUES

SCHEDE TECNICHE

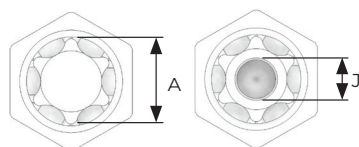
TECHNICAL DATASHEETS

TORX®

A REGISTERED TRADEMARK OF ACCUMENT GLOBAL TECHNOLOGIES


 IN ACCORDO A NORME INTERNAZIONALI
 IN ACCORDANCE WITH INTERNATIONAL STANDARDS

 COPPIA DI TORSIONE SECONDO NORME
 TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

TMD-702
TMD-702*


	A	J	Nm	Nm	Nm	Autofilettanti per metallo Self-tapping for metal			Autofilettanti per legno Self-tapping for wood			Metriche Metrics					
						ISO 7049 = DIN 7981	ISO 7050 = DIN 7982	ISO 7051 = DIN 7983	DIN 7996	DIN 7997	DIN 7995	ISO 7045 = DIN 7985	ISO 7046 = DIN 965	ISO 7047 = DIN 966	DIN 912 7984 6912	ISO 4762 = DIN 912	ISO 10642 = DIN 7991
TX03	1,12			0,25								1,2	1,4	1,4	1,2		
TX04	1,30			0,37													
TX05	1,37		0,43	0,51								1,4 1,6	1,8		1,4 1,6		
TX06	1,65		0,75	0,91		2,2	2,2					1,3 2,0	2,0		1,3 2,0		
TX07	1,97		1,4	1,7													
TX08	2,30	0,74	2,2	2,6	2,2	2,9	2,9	2,9				2,5	2,5	2,5		2,5	
TX09	2,48	0,81	2,8	3,4	2,9	2,9											
TX10	2,27	0,94	3,7	4,5	3,8	3,5	3,5	3,5	3,0	3,0		3,0	3,0	3,0	3,0	3,0	3,0
TX15	3,26	1,19	6,4	7,7	6,5	3,9	3,9	3,9	3,5	3,5		3,5	3,5	3,5	3,5		
TX20	3,84	1,57	10,5	12,7	10,8	4,2	4,2	4,2	4,0 4,5	4,0 4,5	4,5	4,0	4,0	4,0	4,0	4,0	4,0
TX25	4,40	1,96	15,9	19,0	16,1	4,8 5,5	4,8 5,5	4,8 5,5	4,5 6,0	4,5 5,0	4,5	5,0	5,0	5,0	4,0 5,0	5,0	5,0
TX27	4,96	2,21	22,5	26,9	22,9										4,3 5,0		
TX30	5,49	2,72	31,1	37,4	31,8	6,3	6,3	6,3	6,0	6,0		6,0	6,0	6,0	6,0	6,0	6,0
TX40	6,60	3,15	54,1	65,1	55,3	8,0				8,0 10,0		8,0	8,0	8,0	8,0		8,0
TX45	7,77	3,40	86,0	104,0	88,0											8,0	
TX50	8,79	3,73	132,0	159,0	135,0	10,0						10,0	10,0	10,0	10,0	10,0	10,0
TX55	11,17	4,75		257,0	218,0	12,0									12,0	12,0	
TX60	13,20	5,56		445,0	379,0										14,0	14,0	
TX70	15,49	6,73		701,0	596,0												

* PER QUESTO PROFILO I VALORI DI COPPIA INDICATI CORRISPONDONO AL VALORE MINIMO DI ROTTURA

* THE TORQUE VALUES INDICATED FOR THIS PROFILE CORRESPOND TO THE MINIMUM BREAKING VALUE

SCHEDE TECNICHE

TECHNICAL DATASHEETS

TORX-PLUS®

TORX-PLUS® TAMPER RESISTANT

A REGISTERED TRADEMARK OF ACCUMENT GLOBAL TECHNOLOGIES

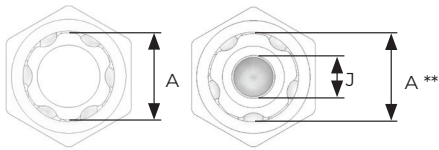


IN ACCORDO A NORME INTERNAZIONALI
IN ACCORDANCE WITH INTERNATIONAL STANDARDS

COPPIA DI TORSIONE SECONDO NORME
TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

NMD-702
NMD-602

NMD-702*
NMD-602*



** DIAMETRO CIRCOSCRITTO · ** CIRCUMSCRIBED DIAMETER ·

							Autofilettanti per metallo Self-tapping for metal			Metriche Metrics					
	A	Nm		A	J	Nm	ISO 7049 = DIN 7981	ISO 7050 = DIN 7982	ISO 7051 = DIN 7983	ISO 7045 = DIN 7985	ISO 7046 = DIN 965	ISO 7047 = DIN 966	DIN 912 7984 6912	ISO 4762 = DIN 912	ISO 10642 = DIN 7991
10IP	2,72	5,42	10IPR	2,72	0,91	4,3	3,5	3,5	2,9 3,5	3,0	3,0	3,0	3,0	3,0	5,0
15IP	3,25	9,62	15IPR	3,25	1,17	7,3	3,9	3,9	3,5 3,9	3,5	3,5 4,0	3,5			6,0
20IP	3,84	16,15	20IPR	3,84	1,55	11,9	4,2	4,2	4,2	4,0	4,0 5,0	4,0	4,0	4,0	6,0
25IP	4,39	23,50	25IPR	4,39	1,93	17,4	4,8 5,5	4,8 5,5	4,8 5,5	5,0	5,0 6,0	5,0	5,0	5,0	7,0 8,0
27IP	4,95	34,62	27IPR	4,95	2,18	25,1									8,0
30IP	5,49	47,18	30IPR	5,49	2,57	33,5	6,3	6,3	6,3	6,0	6,0	6,0	8,0	6,0	
40IP	6,60	82,08	40IPR	6,60	2,92	59,4			8,0		8,0	8,0	8,0	8,0	10,0

* PER QUESTO PROFILO I VALORI DI COPPIA INDICATI CORRISPONDONO AL VALORE MINIMO DI ROTTURA

* THE TORQUE VALUES INDICATED FOR THIS PROFILE CORRESPOND TO THE MINIMUM BREAKING VALUE

SCHEDE TECNICHE

TECHNICAL DATASHEETS

ESAGONO

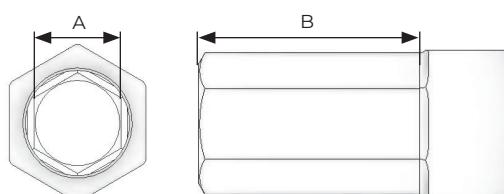


IN ACCORDO A NORME INTERNAZIONALI
 IN ACCORDANCE WITH INTERNATIONAL STANDARDS

COPPIA DI TORSIONE SECONDO NORME
 TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

DIN 911
DIN 7426

DIN 7426*
ISO 2936*



					Metriche Metrics				
	A	B _{MIN}	Nm	Nm	DIN 7984	ISO 4762 = DIN 7984	ISO 10642 = DIN 7991	DIN 908	DIN 913 914 DIN 915 916
0,7	0,7	1,6	0,08						1,4 1,8
0,9	0,9	1,8	0,18						2,0
1,3	1,3	2,0	0,53			1,4			2,5
1,5	1,5	2,3	0,82	0,95		1,6 2,0			3,0
2,0	2,0	3,0	1,9	2,3	3,0	2,5	3,0		4,0
2,5	2,5	3,8	3,4	4,4	4,0	3,0	4,0		5,0
3,0	3,0	4,5	6,6	7,6	5,0	4,0	5,0		6,0
4,0	4,0	6,0	16,0	18,0	6,0	5,0	6,0		8,0
5,0	5,0	7,5	30,0	35,0	8,0	6,0	8,0	10,0	10,0
6,0	6,0	9,0	52,0	61,0		8,0	10,0	12,0 14,0	12,0 14,0
7,0	7,0	10,5	78,0	97,0	10,0				
8,0	8,0	12,0	120,0	140,0	12,0	10,0	12,0	16,0 18,0	16,0 18,0
10,0	10,0	16,0	220,0	280,0	14,0	12,0	14,0 16,0	20,0 22,0	20,0 22,0
12,0	12,0	18,0	370,0	480,0	16,0 18,0	14,0	18,0 20,0	24,0 26,0	24,0 26,0
14,0	14,0	25,0	590,0		20,0 22,0	16,0 18,0	22,0 24,0		

* LE NORME PREVEDONO CHE SOTTO IL VALORE DI COPPIA INDICATA IL PROFILO DELL'UTENSILE NON PRESENTI ALCUNA DEFORMAZIONE

* THE STANDARDS REQUIRE THAT THE TOOL PROFILE DOES NOT DEFORM UNDER THE INDICATED TORQUE VALUES

SCHEDE TECNICHE

TECHNICAL DATASHEETS

TAGLIO



IN ACCORDO A NORME INTERNAZIONALI
IN ACCORDANCE WITH INTERNATIONAL STANDARDS

COPPIA DI TORSIONE SECONDO NORME
TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

DIN-ISO 2380

DIN-ISO 2380*

					Autofilettanti per metallo Self-tapping for metal			Autofilettanti per legno Self-tapping for wood			Metriche Metrics				
Ø	A	T	Nm	Nm	ISO 1481 = DIN 7971	ISO 1482 = DIN 7972	ISO 1483 = DIN 7973	DIN 96	DIN 97	DIN 95	ISO 1207 = DIN 84	ISO 1580 = DIN 85	ISO 2009 = DIN 963	ISO 2010 = DIN 964	ISO 4766 7435 = DIN 417-427
1,5	0,30	0,50		0,15											
1,8	0,37	0,50		0,28							1,2 1,4				
2,0	0,40	0,70	0,3	0,35				1,6	1,6				1,6		2,5 3,0
2,5	0,40	0,70	0,4	0,45				2,0		1,6	1,6 1,8			1,6	3,5
3,0	0,50	0,90	0,7	0,8		2,2	2,2		2,0	2,0	2,0		2,0	2,0	4,0
3,5	0,60	1,10	1,3	1,4	2,2			2,5	2,5	2,5	2,5		2,5	2,5	
4,0	0,50	0,90		1,1				2,0							
4,0	0,80	1,40	2,6	2,9	2,9	2,9	2,9	3,0 3,5	3,0 3,5	3,0 3,5	3,0	3,0	3,0 3,5	3,0 3,5	5,0 6,0
4,5	0,60	1,10		1,8	2,2			2,5			2,5				
5,0	0,80	1,40	3,2	3,6											
5,5	0,80	1,40	3,5	3,9				3,5		3,5	3,0	3,5	3,5	3,5	
5,5	1,00	1,80	5,5	6,2	3,5 3,9	3,5 3,9	3,5 3,9	4,0 4,5	4,0 4,5	4,0 4,5	3,5	3,5	4,0	4,0	
6,0	1,00	1,80		6,7											
6,5	1,20	2,20	9,4	10,5		4,2 4,8	4,2	5,0 5,5	5,0	5,0	4,0		5,0	5,0	8,0
7,0	1,20	2,20	10,0	11,3											
8,0	1,20	2,20	11,5	12,9	4,2		4,8		5,5	5,5	5,0	4,0			
8,0	1,60	2,90	20,5	22,9	4,8	5,5 6,3	5,5	6,0	6,0	6,0		5,0	6,0	6,0	10,0 12,0
10,0	1,60	2,90	25,6	28,7	5,5 6,3		6,3		7,0 8,0	7,0	6,0				14,0
13,0	2,00	3,60	52,0	58,0				8,0	10,0		8,0	8,0	8,0	8,0	16,0

* LE NORME PREVEDONO CHE SOTTO IL VALORE DI COPPIA INDICATA IL PROFILO DELL'UTENSILE NON PRESENTI ALCUNA DEFORMAZIONE

* THE STANDARDS REQUIRE THAT THE TOOL PROFILE DOES NOT DEFORM UNDER THE INDICATED TORQUE VALUES

SCHEDE TECNICHE

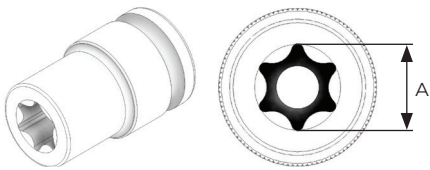
TECHNICAL DATASHEETS

TORX®

A REGISTERED TRADEMARK OF ACCUMENT GLOBAL TECHNOLOGIES



IN ACCORDO A SPECIFICA ACCUMENT GLOBAL TECHNOLOGIES
IN ACCORDANCE WITH THE SPECIFICATIONS OF ACCUMENT GLOBAL TECHNOLOGIES



		Metriche Metrics	
			
	A	ISO 4014 - 4017 = DIN 931 - 933	ISO 8100 = DIN 6921
E5	4,72	4,0	
E6	5,69	5,0	4,0
E7	6,17		
E8	7,47	6,0 7,0	5,0
E10	9,37	8,0	6,0
E11	10,03		
E12	11,12	10,0 11,0	8,0
E14	12,85	12,0	10,0
E16	14,71		
E18	16,64	14,0	12,0
E20	18,41	16,0	14,0
E22	20,24		
E24	22,09	18,0 20,0	

SCHEDE TECNICHE

TECHNICAL DATASHEETS

ESAGONO



IN ACCORDO A NORME INTERNAZIONALI
IN ACCORDANCE WITH INTERNATIONAL STANDARDS

COPPIA DI TORSIONE SECONDO NORME
TIGHTENING TORQUE IN ACCORDANCE WITH THE STANDARDS

DIN 3129

DIN-ISO 1711*



			Autofilettanti per metallo Self-tapping for metal	Autofilettanti per legno Self-tapping for wood	Metriche Metrics		
							
	 Nm	 Nm	ISO 1479 = DIN 7976	DIN 571	ISO 4014 4016 4017	ISO 4035 4036 = DIN 439	ISO 4032 4033 = DIN 934
4		10,4			2,0	2,0	2,0
4,5		12,6			2,3		
5	11,5	15,1	2,9		2,5	2,5	2,5
5,5	14,4	17,8	3,5		3,0	3,0	3,0
6	17,6	23,2			3,5	3,5	3,5
7	25,2	33,2	3,9 4,2	4,0	4,0	4,0	4,0
8*	34,5	94,1	4,8 5,5	5,0	5,0	5,0	5,0
9*	45,4	119,2					
10*	58,1	147,0	6,3	6,0	6,0	6,0	6,0
11*	72,7	178,0			7,0		7,0
12*	89,1	212,0		7,0			
13*	107,0	249,0	8,0	8,0	8,0	8,0	8,0
14*	128,0	288,0					

* VALUTARE ANCHE RESISTENZA ATTACCO


* ALSO EVALUATE ATTACHMENT RESISTANCE

SCHEDE TECNICHE

TECHNICAL DATASHEETS

ATTACCHI MASCHIO STANDARD, APPLICAZIONI, RESISTENZE

STANDARD MALE ATTACHMENTS, APPLICATIONS, RESISTANCES


	 A  B		APPLICAZIONE APPLICATION	STANDARDS	Nm
	A=3mm			DIN 3126 Form A3	7,6
	A=4mm - 5/32"			DIN 3126 Form C4	18,0
	A=5,5mm			DIN 3126 Form A5,5	47,0
	B=VARIE			LTI	N.A.
	B=7mm			LTI	N.A.
	A=6,35mm - 1/4"			DIN 3126 Form C6,3	71,0
	A=6,35mm - 1/4"			DIN 3126 Form E6,3	71,0
	A=7,93mm - 5/16"			DIN 3126 Form C8	144,0
	A=7,93mm - 5/16"			FIAM-DESOUTTER	144,0
	A=9,52mm - 3/8"			AUTOMOTIVE	280,0
	A=11,2mm - 7/16"			DIN 3126 Form E11,2	396,0
	B=M4x0,7			ISO 724 - DIN 13.1	7,0
	B=M5x0,8			ISO 724 - DIN 13.1	18,0
	B=M6x1			ISO 724 - DIN 13.1	25,0
	B=10x32 UNF			ISO 724 - DIN 13.1	18,0
	B=BSF 3/16x32 Whitworth			ISO 724 - DIN 13.1	18,0


SCHEDE TECNICHE

TECHNICAL DATASHEETS

ATTACCHI QUADRO STANDARD, APPLICAZIONI, RESISTENZE

STANDARD SQUARE ATTACHMENTS, APPLICATIONS, RESISTANCES

			APPLICAZIONE APPLICATION	STANDARDS	Nm
	A=6,35mm - 1/4"			DIN 3121 Form G6,3	68,6
	A=9,52mm - 3/8"			DIN 3121 Form G10	225,0
	A=12,70mm - 1/2"			DIN 3121 Form G12,5	569,0
	A=19,05mm - 3/4"			DIN 3121 Form H20	1569,0
	A=25,40mm - 1"			DIN 3121 Form H25	2795,0
	A=38,10mm - 1-1/2"			DIN 3121 Form H40	

			APPLICAZIONE APPLICATION	STANDARDS	Nm
	A=6,35mm - 1/4"			DIN 3121 Form G6,3	62,0
	A=9,52mm - 3/8"			DIN 3121 Form G10	202,0
	A=12,70mm - 1/2"			DIN 3121 Form G12,5	512,0
	A=19,05mm - 3/4"			DIN 3121 Form D20	1412,0